

2017 CATALOG



flow



level



temperature



pressure















Digital Meters & Controllers

**PRECISION
DIGITAL** 

www.predig.com

Table of Contents

	DIGITAL PANEL METERS	4
	LOOP-POWERED METERS	16
	LARGE DISPLAY METERS	24
	FIELD MOUNT INDICATORS	32
	EXPLOSION-PROOF INSTRUMENTS	36
	INDUSTRIAL WIRELESS SYSTEMS	50
	ANNUNCIATORS & SCANNERS	52
	MULTI-CHANNEL CONTROLLERS	54
	TEMPERATURE CONTROLLERS	56
	NEMA 4 & 4X ENCLOSURES	58
	SOFTWARE	60
	ACCESSORIES	63

Why Precision Digital?



2-3 Day Availability



3-Year Warranty



40+ Years of Engineering



Worldwide Approved

What's New

Helios Series

The power of the PROVu® with a superluminous sunlight readable display, 3X the digit height, and visible from 100 feet away.



Loop Leader® PD6600 Series

Loop-powered meters with backlit displays and 2 open collector outputs standard. Option for 2 solid state relays + 4-20 mA out.

PDW Industrial Wireless Systems

Point-to-point wireless systems completely customizable to satisfy any wireless application.



Superluminous Displays

Our brightest LEDs ever now on PROVu®, ProtEX-MAX, and Helios Series. For optimum visibility indoors and in direct sunlight.

On-Board USB & Programming Software

Available on the PROVu®, ProtEX-MAX, and Helios Series.



PD603 Sabre P Process Meter



Sabre Series



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ±10 VDC (0-5, 1-5, 0-10 V)
Display	4-digit, 0.56" (14.2 mm)
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC option
Operating Temp	0 to 65°C
Minimum Order Qty	5 units

FEATURES

- Maximum/minimum display
- Scale without a signal source
- Calibrate with a signal source
- Easy front panel programming
- Shallow depth enclosure

OPTIONS

- 24 VDC transmitter power supply

PD644 Javelin D High-Voltage DC Meter



SPECIFICATIONS

Input	0-300 VDC
Display	4-digit, 0.56" (14.2 mm)
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC option
Operating Temp	0 to 65°C

FEATURES

- Maximum/minimum display
- RS-485 serial communications
- 4-20 mA output standard
- Modbus® RTU
- Shallow depth enclosure

OPTIONS

- 2 form C relays
- 24 VDC transmitter supply

PD743 Sabre T Temperature Meter



Sabre Series



SPECIFICATIONS

Input	Thermocouple J, K, T, E; RTD 100 Ω platinum
Display	4-digit, 0.56" (14.2 mm)
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC option
Operating Temp	0 to 65°C
Minimum Order Qty	5 units

FEATURES

- 1° or 0.1° resolution with RTD
- Maximum/minimum display
- Pre-calibrated for all input types
- Easy front panel programming
- Shallow depth enclosure

PD765 Trident Process & Temperature Meter



Trident Virtual Meter
tvm.predig.com

SPECIFICATIONS

Input	Process: 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V) Temperature: Thermocouple J, K, T, E; RTD 100 Ω Pt
Display	4-digit, 0.56" (14.2 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC option
Operating Temp	-40 to 65°C

FEATURES

- 1° or 0.1° resolution with RTD
- Sunlight readable display
- Maximum/minimum display
- Linear or square root with low-flow cutoff
- Transmitter power option
- Modbus® RTU & LabVIEW™ driver
- Shallow depth enclosure

PROGRAMMING SOFTWARE

- MeterView® programming software free download

OPTIONS

- 2 relays and 4-20 mA analog output
- 24 VDC transmitter power supply
- Dual 24 VDC transmitter power supplies
- USB, RS-232, & RS-485 serial communications

PD765 X2 Trident X2 Process & Temperature Meter



Trident Virtual Meter
tvm.predig.com

SPECIFICATIONS

Input	Process: 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V) Temperature: Thermocouple J, K, T, E; RTD 100 Ω Pt
Display	4-digit, 1.20" (30.5 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC option
Operating Temp	-40 to 65°C

FEATURES

- 1° or 0.1° resolution with RTD
- Sunlight readable display
- Maximum/minimum display
- Linear or square root with low-flow cutoff
- Transmitter power option
- Modbus® RTU & LabVIEW™ driver
- Shallow depth enclosure

PROGRAMMING SOFTWARE

- MeterView® programming software free download

OPTIONS

- 2 relays and 4-20 mA analog output
- 24 VDC transmitter power supply
- Dual 24 VDC transmitter power supplies
- USB, RS-232, & RS-485 serial communications

PD865 Snooper Modbus® Serial Input Meter



Snooper



SPECIFICATIONS

Input	RS-485 Modbus® RTU
Display	6-digit, 0.56" (14.2 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Master, slave, or snooper mode
- 2 form A relays
- Linear, square root, or programmable exponent
- RS-485 serial communications
- Proxy polling for up to 8 PVs
- Shallow depth enclosure

OPTIONS

- 2 form C relays
- Isolated 4-20 mA transmitter output

PD6000 PROVu® Process Meter

IMPROVED



PROVu
SERIES



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ±10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Dual-scale for level applications
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- Tare function

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6001 PROVu® Feet & Inches Level Meter

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Ft & In display ideal for level applications
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Dual-scale for level applications
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6060 PROVu® Dual-Input Process Meter

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Displays two inputs simultaneously
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA output modules
- RS-232 & RS-485 serial communications
- SunBright display models

Brilliant

Our Brightest & Most Intelligent PROVu[®] Ever



Superluminous
Displays

Our brightest
LEDs ever



On-Board
MeterView[®] Pro

PC programming
software



On-Board
USB Port

Streamlines meter
programming

See what PROVu[®] has to offer
www.predig.com/provu

PROVu[®]
SERIES

PD6080 PROVu® Modbus® Scanner with Dual Analog Input

IMPROVED



SPECIFICATIONS

Input	Modbus® RTU; Dual 0-20 mA, 4-20 mA, ±10 VDC (0-5, 1-5, 0-10 V)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

PROVu
SERIES



FEATURES

- **NEW** brighter SunBright display
- Master, slave, or snooter mode
- Poll and display up to 16 PVs
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- 4-20 mA analog output option (up to 3)

PROGRAMMING SOFTWARE

- **NEW** on-board USB & ScanView programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA output modules
- RS-232 serial communications

PD6081 PROVu® Feet & Inches Modbus® Scanner with Dual Analog Input

IMPROVED



SPECIFICATIONS

Input	Modbus® RTU; Dual 0-20 mA, 4-20 mA, ±10 VDC (0-5, 1-5, 0-10 V)
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

PROVu
SERIES



FEATURES

- **NEW** brighter SunBright display
- Master, slave, or snooter mode
- Poll and display up to 16 PVs
- Ft & In display ideal for level applications
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, sq. root, or exp. linearization
- 4-20 mA analog output option (up to 3)

PROGRAMMING SOFTWARE

- **NEW** on-board USB & ScanView programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA output modules
- RS-232 serial communications

PD6088 PROVu® Modbus® Scanner

IMPROVED



SPECIFICATIONS

Input	Modbus® RTU
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

PROVu®
SERIES



FEATURES

- **NEW** brighter SunBright display
- Master, slave, or snooper mode
- Poll and display up to 16 PVs
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- 4-20 mA analog output option (up to 3)

PROGRAMMING SOFTWARE

- **NEW** on-board USB & ScanView programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA output modules

PD6089 PROVu® Feet & Inches Modbus® Scanner

IMPROVED



SPECIFICATIONS

Input	Modbus® RTU
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

PROVu®
SERIES



FEATURES

- **NEW** brighter SunBright display
- Master, slave, or snooper mode
- Poll and display up to 16 PVs
- Ft & In display ideal for level applications
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, sq. root, or exp. linearization
- 4-20 mA analog output option (up to 3)

PROGRAMMING SOFTWARE

- **NEW** on-board USB & ScanView programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA output modules

PD6100 PROVu® Strain Gauge Meter

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	15, 30, 150, 300 mV unipolar; ± 15 , ± 25 , ± 150 , ± 250 mV bipolar; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- 5 or 10 VDC sensor excitation
- Supports up to twelve 350 Ω load cells (minimum load resistance of 28 Ω)
- Capture or programmable tare feature
- Auto-zero feature eliminates zero drift
- Ratiometric operation
- Max/min or peak/valley hold feature
- Dual-scale feature - single input
- Rounding to 1, 2, 5, 10, 20, 50, or 100

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6200 PROVu® Analog Input Flow Rate/Totalizer

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Isolated 24 VDC @ 200 mA transmitter power supply
- Displays rate and total simultaneously
- Count up or down, total & grand total
- Open channel flow with programmable exponent
- Total, grand total, or non-resettable grand total
- 32-point linearization
- On-board digital input (for remote reset)

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6210 PROVu® Analog Input Batch Controller

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Isolated 24 VDC @ 200 mA transmitter power supply
- Start, batch, pause, & stop with front panel buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching with up to 8 relays
- Automatic overrun correction
- Manual control or automatic batching
- On-board digital input (for remote reset)

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6262 PROVu® Dual Analog Input Flow Rate/Totalizer

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Display two flow inputs simultaneously
- Display rate & total simultaneously
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Count up or down, total & grand total
- Open channel flow with programmable exponent
- Total, grand total, or non-resetable grand total

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA output modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6300 PROVu® Pulse Input Flow Rate/Totalizer

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- 5, 10, or 24 VDC flowmeter power supply
- Displays rate and total simultaneously
- Count up or down, total & grand total
- Gate function for rate display of slow pulse rates
- K-Factor, internal scaling, or external calibration
- Total, grand total, or non-resetable grand total

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6310 PROVu® Pulse Input Batch Controller

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- 5, 10, or 24 VDC flowmeter power supply
- K-Factor, internal scaling, or external calibration
- Start, batch, pause, & stop with front panel buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching with up to 8 relays
- Automatic overrun correction
- Manual control or automatic batching

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6310-WM PROVu® Weights & Measures Batch Controller

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- NTEP® Certified weighing and measuring device
- Mechanically secured programming
- Start, batch, pause, & stop buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching with up to 8 relays
- Automatic overrun correction
- Manual control or automatic batching
- Count up or down, total & grand total

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6363 PROVu® Dual Pulse Input Flow Rate/Totalizer

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Dual Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- Displays two inputs simultaneously
- Displays rate and total simultaneously
- Math functions capabilities
- 5, 10, or 24 V flowmeter power supply
- Count up or down, total & grand total
- Gate function for rate display of slow pulse rates
- K-Factor, internal scaling, or external calibration
- Total, grand total, or non-resetable grand total

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay, digital I/O, & dual 4-20 mA out modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD6400 PROVu® High Voltage & Current Meter

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	High voltage: (channel V) 0-300 VDC or VAC; High current: (channel A) 0-5 AAC or ADC; Modbus PV (Slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter display
- (1) high voltage and (1) high current Input
- Displays voltage and current simultaneously
- Multiplication for apparent power calculation

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD7000 PROVu® Temperature Meter

IMPROVED



PROVu®
SERIES



SPECIFICATIONS

Input	Thermocouple J, K, T, E, R, S, B, N, C; RTD 100 Ω Pt, 10 Ω Cu, 120 Ω Ni, 1,000 Ω Pt; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	1/8 DIN, NEMA 4X/IP65 front
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-20 to 65°C

FEATURES

- **NEW** brighter display
- 1° or 0.1° resolution
- Displays up to 3300°F
- Averages up to 10 RTD sensors
- Automatic cold junction compensation

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS

- 4-20 mA output with isolated 24 VDC
- 2 or 4 form C internal relays
- External 4-relay and digital I/O expansion modules
- RS-232 & RS-485 serial communications
- SunBright display models

PD662 Survivor NEMA 4X Process Meter

SPECIFICATIONS

Input	4-20 mA
Display	3½+ digits 0.6" (15.24 mm)
Enclosure	NEMA 4X high impact plastic
Power	Loop-powered
V Drop	1.7 V 3.7 V with backlight
Operating Temp	-40 to 75°C (-55 to 75°C with heater)

FEATURES

- Maximum/minimum display
- Easy four-button programming
- ½" NPT conduit hole
- HART protocol transparent
- Multi-point linearization and square root function

OPTIONS

- Heater
- Loop-powered backlight



Survivor



PD683 Loop Leader® Process Meter

SPECIFICATIONS

Input	4-20 mA
Display	5-digit, 0.6" (15.2 mm)
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	Loop-powered
V Drop	2.0 V 5.7 V with backlight
Operating Temp	-30 to 65°C

FEATURES

- Loop-powered backlight standard
- Custom engineering units
- Maximum/minimum display
- Linear, square root or programmable exponent
- Bargraph display and trend arrow
- Shallow depth enclosure

OPTIONS

- PD688 intrinsically safe version



Loop Leader®
Series



PD684 Loop Leader® Rate/Totalizer

SPECIFICATIONS

Input	4-20 mA
Display	5-digit, 0.6" (15.2 mm)
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	Loop-powered
V Drop	2.0 V 5.7 V with backlight
Operating Temp	-20 to 65°C

FEATURES

- Loop-powered backlight standard
- Custom engineering units
- Maximum/minimum display
- Linear, square root or programmable exponent
- Bargraph display and trend arrow
- Alternating rate/total display
- Open collector alarm or pulse output
- Shallow depth enclosure

OPTIONS

- PD689 intrinsically safe version



Loop Leader®
Series



IMPROVED

PD685 NEMA 4X Process Meter

SPECIFICATIONS

Input	4-20 mA
Display	3½ digits, 1.0" (25.4 mm)
Enclosure	NEMA 4X high impact plastic
Power	Loop-powered
V Drop	1.0 V 4.0 V with backlight
Operating Temp	-40 to 80°C

FEATURES

- **NEW** Loop-powered backlight
- **NEW** ATEX & CE certification (Check www.predig.com for details)
- ½" NPT conduit hole (bottom)
- NEMA 4X IP67 high impact plastic enclosure

OPTIONS

- ½" conduit hole (rear, top, or none)
- PD686 FM and CSA approved



Intrinsically safe
Check www.predig.com for details

PD686 NEMA 4X Process Meter

SPECIFICATIONS

Input	4-20 mA
Display	3½ digits, 1.0" (25.4 mm)
Enclosure	NEMA 4X high impact plastic
Power	Loop-powered
V Drop	1.0 V
Operating Temp	-40 to 85°C

FEATURES

- ½" NPT conduit hole (bottom)
- NEMA 4X IP67 high impact plastic enclosure

OPTIONS

- ½" conduit hole (rear, top, or none)
- PD685 ATEX and CE approved



Intrinsically safe and non-incendive

PD688 Loop Leader® Process Meter

SPECIFICATIONS

Input	4-20 mA
Display	5-digit, 0.6" (15.2 mm)
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	Loop-powered
V Drop	2.0 V 5.7 V with backlight
Operating Temp	-30 to 65°C

FEATURES

- Loop-powered backlight standard
- Custom engineering units
- Maximum/minimum display
- Linear, square root or programmable exponent
- Bargraph display and trend arrow
- Shallow depth enclosure

OPTIONS

- PD683 safe area version



Intrinsically safe and non-incendive

NEW

Simple. Capable.

Two-wire, loop-powered meters and totalizers with an information packed display for alarms, pump control, & retransmission



Key Benefits

- Loop-powered backlight
- Alphanumeric tag names
- Decimal, bargraph, and feet & inches displays
- Total display with commas
- Conformal coating protection
- Relay pump alternation
- Batch control relay operation

Standard Features

2

Open Collector Outputs

2

Color Backlight

2

Line Display

1.5

Voltage Drop

Optional Features

2

Solid State Relays

1

4-20 mA Analog Output

1

20-Segment Bargraph

3

Display Types

See what Loop Leader® has to offer
www.predig.com/loopleader



PD689 Loop Leader® Rate/Totalizer

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit, 0.6" (15.2 mm)		
Enclosure	1/8 DIN, NEMA 4X/IP65 front		
Power	Loop-powered		
Operating Temp	-20 to 65°C	V Drop	2.0 V 5.7 V with backlight



Loop Leader®
Series



Intrinsically safe and non-incendive

FEATURES

- Loop-powered backlight standard
- Custom engineering units
- Maximum/minimum display
- Linear, square root or programmable exponent
- Bargraph display and trend arrow
- Alternating rate/total display
- Open collector alarm or pulse output
- Shallow depth enclosure

OPTIONS

- PD684 safe area version

PD6602 Loop Leader® Process Meter

NEW

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.7" (17.8 mm), 8 alphanumeric character lower display 0.4" (10.1 mm) with commas		
Enclosure	1/8 DIN, NEMA 4X/IP65 front		
Power	Loop-powered		
Operating Temp	-40 to 75°C	V Drop	1.5 V 4.5 V with backlight



Loop Leader®
Series

FEATURES

- Loop-powered backlight standard
- Alphanumeric tag names
- Conformal coating for protection
- Shallow depth enclosure
- 2 open collector outputs standard
- Timer functions for OC and relays
- Relay pump alternation
- Relay runtime and cycle count
- Multi-point linearization, square root, exponential, and round horizontal tank input conditioning functions

OPTIONS

- 2 solid state relays
- 4-20 mA analog output

PD6603 Loop Leader® Feet & Inches Level Meter with Bargraph

NEW

SPECIFICATIONS

Input	4-20 mA		
Display	0.7" (17.8 mm) feet & inches upper display, 8 alphanumeric character lower display 0.4" (10.1 mm) with commas, & 20-segment bargraph		
Enclosure	1/8 DIN, NEMA 4X/IP65 front		
Power	Loop-powered		
Operating Temp	-40 to 75°C	V Drop	1.5 V 4.5 V with backlight



Loop Leader®
Series

FEATURES

- Loop-powered backlight standard
- Ft & In display ideal for level applications
- Displays up to 999 ft 11 in ¹⁵/₁₆
- Alphanumeric tag names
- Conformal coating for protection
- 20-Segment bargraph display
- Shallow depth enclosure
- 2 open collector outputs standard
- Multi-point linearization, square root, exponential, and round horizontal tank input conditioning functions

OPTIONS

- 2 solid state relays
- 4-20 mA analog output

PD6604 Loop Leader® Process Meter with Bargraph

NEW

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.7" (17.8 mm), 8 alphanumeric character lower display 0.4" (10.1 mm) with commas, & 20-segment bargraph		
Enclosure	1/8 DIN, NEMA 4X/IP65 front		
Power	Loop-powered		
Operating Temp	-40 to 75°C	V Drop	1.5 V 4.5 V with backlight



Loop Leader®
Series

FEATURES

- Loop-powered backlight standard
- 20-Segment bargraph display
- Alphanumeric tag names
- Conformal coating for protection
- Shallow depth enclosure
- 2 open collector outputs standard
- Timer functions for OC and relays
- Relay pump alternation
- Multi-point linearization, square root, exponential, and round horizontal tank input conditioning functions

OPTIONS

- 2 solid state relays
- 4-20 mA analog output

NEW

PD6622 Loop Leader® Flow Rate/Totalizer

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.7" (17.8 mm), 8 alphanumeric character lower display 0.4" (10.1 mm) with commas		
Enclosure	1/8 DIN, NEMA 4X/IP65 front		
Power	Loop-powered		
Operating Temp	-40 to 75°C	V Drop	1.5 V 4.5 V with backlight



Loop Leader
Series

FEATURES

- Loop-powered backlight
- Display rate & total simultaneously
- Intuitive total display with commas
- Alphanumeric tag names
- Total, grand total, or non-resettable grand total
- Up to 13-digit total & grand total
- Conformal coating for protection
- 2 open collector outputs standard
- Shallow depth enclosure
- Batch control relay operation

OPTIONS

- 2 solid state relays
- 4-20 mA analog output

PD6624 Loop Leader® Flow Rate/Totalizer with Bargraph

NEW

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.7" (17.8 mm), 8 alphanumeric character lower display 0.4" (10.1 mm) with commas, & 20-segment bargraph		
Enclosure	1/8 DIN, NEMA 4X/IP65 front		
Power	Loop-powered		
Operating Temp	-40 to 75°C	V Drop	1.5 V 4.5 V with backlight



Loop Leader
Series

FEATURES

- Loop-powered backlight
- 20-Segment bargraph display
- Display rate & total simultaneously
- Intuitive total display with commas
- Alphanumeric tag names
- Total, GT, or non-resettable GT
- Up to 13-digit total & grand total
- Conformal coating for protection
- 2 open collector outputs standard
- Shallow depth enclosure
- Batch control relay operation

OPTIONS

- 2 solid state relays
- 4-20 mA analog output

NEW

The Next Generation Large Display Meters & Controllers

The power of the PROVu[®] with a superluminous
sunlight readable display, 3X the digit height,
and visible from 100 feet away.

CE



HELIOS

www.predig.com/helios

PRECISION DIGITA



Dual-line 6-digit 1.8"
(46 mm) Display



Superluminous
Display



Visible from
100 Ft Away



IP65
Enclosure



On-Board USB
Programming



Field Mountable,
Great for Outdoors

Actual
Size



PD2-6000 Helios Process Meter

NEW



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Dual-scale for level applications
- Signal input conditioning for flow & level
- 32-point, square root, exponential, or round horizontal tank linearization
- Tare function

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6001 Helios Feet & Inches Level Meter

NEW



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Ft & In display ideal for level applications
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Dual-scale for level applications
- Signal input conditioning for flow & level
- 32-point, square root, exponential, or round horizontal tank linearization

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

NEW

PD2-6060 Helios Dual-Input Process Meter



SPECIFICATIONS

Input	Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Displays two inputs simultaneously
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, exponential, or round horizontal tank linearization

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6080 Helios Modbus® Scanner with Dual Analog Input

NEW



SPECIFICATIONS

Input	Modbus® RTU; Dual 0-20 mA, 4-20 mA, ± 10 VDC (0-5, 1-5, 0-10 V)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Master, slave, or snoop mode
- Poll and display up to 16 PVs
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, exponential, or round horizontal tank linearization

PROGRAMMING SOFTWARE

- On-board USB and ScanView programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6081 Helios Feet & Inches Modbus® Scanner with Dual Analog Input

NEW

**SPECIFICATIONS**

Input	Modbus® RTU; Dual 0-20 mA, 4-20 mA, ± 10 VDC (0-5, 1-5, 0-10 V)
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Master, slave, or snooter mode
- Poll and display up to 16 PVs
- Ft & In display ideal for level applications
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, sq. root, or exp. linearization

PROGRAMMING SOFTWARE

- On-board USB and ScanView programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6100 Helios Strain Gauge Meter

NEW

**SPECIFICATIONS**

Input	15, 30, 150, 300 mV unipolar; ± 15 , ± 25 , ± 150 , ± 250 mV bipolar; Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- 5 or 10 VDC sensor excitation
- Supports up to twelve 350 Ω load cells (minimum load resistance of 28 Ω)
- Capture or programmable tare feature
- Auto-zero feature eliminates zero drift
- Ratiometric operation
- Max/min or peak/valley hold feature
- Dual-scale feature - single input
- Rounding to 1, 2, 5, 10, 20, 50, or 100

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

NEW

PD2-6200 Helios Analog Input Flow Rate/Totalizer



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Isolated 24 VDC @ 200 mA transmitter power supply
- Displays rate and total simultaneously
- Count up or down, total & grand total
- Open channel flow with programmable exponent
- Total, grand total, or non-resettable grand total
- 32-point linearization
- On-board digital input (for remote reset)

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6210 Helios Analog Input Batch Controller

NEW



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Isolated 24 VDC @ 200 mA transmitter power supply
- Start, batch, pause, & stop with front panel buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching
- Automatic overrun correction
- Manual control or automatic batching
- On-board digital input (for remote reset)

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6262 Helios Dual Analog Input Flow Rate/Totalizer

NEW

**SPECIFICATIONS**

Input	Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Display two flow inputs simultaneously
- Display rate & total simultaneously
- Math functions capabilities
- Isolated 24 VDC @ 200 mA transmitter power supply
- Count up or down, total & grand total
- Open channel flow with programmable exponent
- Total, grand total, or non-resetable grand total

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6300 Helios Pulse Input Flow Rate/Totalizer

NEW

**SPECIFICATIONS**

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave; Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- 5, 10, or 24 VDC flowmeter power supply
- Displays rate and total simultaneously
- Count up or down, total & grand total
- Gate function for rate display of slow pulse rates
- K-Factor, internal scaling, or external calibration
- Total, grand total, or non-resetable grand total

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

NEW

PD2-6310 Helios Pulse Input Batch Controller



SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave; Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- 5, 10, or 24 VDC flowmeter power supply
- K-Factor, internal scaling, or external calibration
- Start, batch, pause, & stop with front panel buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching
- Automatic overrun correction
- Manual control or automatic batching

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6363 Helios Dual Pulse Input Flow Rate/Totalizer

NEW



SPECIFICATIONS

Input	Dual Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave; Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- Displays rate and total simultaneously
- Displays two inputs simultaneously
- Math functions capabilities
- 5, 10, or 24 V flowmeter power supply
- Count up or down, total & grand total
- K-Factor, internal scaling, or external calibration
- Total, grand total, or non-resettable grand total

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-6400 Helios High Voltage & Current Meter

NEW



SPECIFICATIONS

Input	High voltage: (channel V) 0-300 VDC or VAC; High current: (channel A) 0-5 AAC or ADC; Modbus PV (Slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- (1) high voltage and (1) high current input
- Displays voltage and current simultaneously
- Multiplication for apparent power calculation

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD2-7000 Helios Temperature Meter

NEW



SPECIFICATIONS

Input	Thermocouple J, K, T, E, R, S, B, N, C; RTD 100 Ω Pt, 10 Ω Cu, 120 Ω Ni, 1,000 Ω Pt; Modbus PV (slave)
Display	Dual-line 6-digit, 1.80" (46 mm)
Enclosure	Polycarbonate & glass blended plastic / IP65 rated
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-20 to 65°C

FEATURES

- Superluminous SunBright display
- Readable from 100 feet away
- 1° or 0.1° resolution
- Displays up to 3300°F
- Averages up to 10 RTD sensors
- Automatic cold junction compensation

PROGRAMMING SOFTWARE

- On-board USB and MeterView® Pro programming software

OPTIONS

- 4 form C relays + 4-20 mA output with isolated 24 VDC power supply

PD650 Large Display Process Meter



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V)
Display	4½ digits, 2.3" (57.3 mm)
Enclosure	NEMA 4X aluminum
Power	115/230 VAC or 22-28 VDC
Operating Temp	-20 to 65°C

FEATURES

- Programmable exponent for weirs & flumes
- 6-digit display for total
- Two 24 VDC transmitter power supplies

OPTIONS

- 200 mA transmitter power supply
- 2 or 4 relays & 4-20 mA output

PD655 Large Display Process Meter



SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V)
Display	4½ digits, 1.0" (25.4 mm)
Enclosure	NEMA 4X high impact plastic
Power	115/230 VAC or 22-28 VDC
Operating Temp	-20 to 65°C


FEATURES

- Programmable exponent for weirs & flumes
- 6-digit display for total
- Two 24 VDC transmitter power supplies
- Pump alternation

OPTIONS

- 200 mA transmitter power supply
- 2 or 4 relays & 4-20 mA output

PD6700-0L1 Vantageview Level Meter



SPECIFICATIONS

Input	4-20 mA	
Display	5-digit upper display 0.7" (17.8 mm); 7 alphanumeric character lower display 0.4" (10.2 mm)	
Enclosure	Plastic NEMA 4X field mount	
Power	Loop-powered	V Drop 3.0 V
Operating Temp	-40 to 75°C	6.0 V with backlight


FEATURES

- Level indication bargraph
- Open collector Hi or Lo alarm
- Alphanumeric tag names
- 32-point, square root, or exponential linearization
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-window button programming

OPTIONS

- PD6800-0L1 explosion-proof version

PD6700 Vantageview Process Meter



SPECIFICATIONS

Input	4-20 mA	
Display	5-digit upper display 0.7" (17.8 mm); 7 alphanumeric character lower display 0.4" (10.2 mm)	
Enclosure	Plastic NEMA 4X field mount	
Power	Loop-powered	V Drop 3.0 V
Operating Temp	-40 to 75°C	6.0 V with backlight

FEATURES

- Alphanumeric tag names
- 32-point, square root, or exponential linearization
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-window button programming


OPTIONS

- PD6800 explosion-proof version

PD6701 Vantageview Feet & Inches Level Meter



 vantageview



SPECIFICATIONS

Input	4-20 mA		
Display	0.6" (15.24 mm) feet & inches upper display; 7 alphanumeric character lower display 0.4" (10.2 mm)		
Enclosure	Plastic NEMA 4X field mount		
Power	Loop-powered	V Drop	3.0 V
Operating Temp	-40 to 75°C		6.0 V with backlight

FEATURES

- Ft & In display ideal for level applications
- Displays up to 699 ft 11 in & $\frac{7}{8}$ or $\frac{15}{16}$
- Lower display for alphanumeric tag, volume, or percent
- 20-segment tank level bargraph
- Open collector Hi or Lo alarm
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-window button programming


OPTIONS

- PD6801 explosion-proof version

PD6720 Vantageview Analog Input Flow Rate/Totalizer



 vantageview



SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.7" (17.8 mm); 7 alphanumeric character lower display 0.4" (10.2 mm)		
Enclosure	Plastic NEMA 4X field mount		
Power	Loop-powered	V Drop	3.0 V
Operating Temp	-40 to 75°C		6.0 V with backlight

FEATURES

- 7-digit totalizer
- Open collector pulse or alarm output
- 32-point, square root, or exponential linearization
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-window button programming


OPTIONS

- PD6820 explosion-proof version

PD6730 Vantageview Pulse Input Flow Rate/Totalizer



 vantageview



SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, opto-isolated
Display	5-digit rate 0.7" (17.8 mm); 7 alphanumeric character total 0.4" (10.2 mm)
Enclosure	Plastic NEMA 4X field mount
Power	9-30 VDC, output-loop, or battery
Operating Temp	-40 to 75°C (-20 to 75°C battery)

FEATURES

- 13-digit total with overflow display
- Mounts directly to flowmeter
- Automatic rate, total, & grand total unit conversions
- On-board data logging (1024 points)
- Two isolated open collector pulse outputs, up to 5 kHz
- Backlight standard
- SafeTouch® through-window button programming

OPTIONS

- Isolated 4-20 mA output for rate, total, or grand total
- Isolated or non-isolated RS-485 with Modbus® serial communications
- PD6830 explosion-proof version


PROGRAMMING SOFTWARE

- MeterView® EX programming software
- Configure the meter
- Monitor present trends
- Log to as large of a file as needed

PD6730X Vantageview Modbus® Scanner



 vantageview



SPECIFICATIONS

Input	Modbus® RTU, pulse
Display	5-digit 0.7" (17.8 mm) upper display; 7 alphanumeric character 0.4" (10.2 mm) lower display
Enclosure	Plastic NEMA 4X field mount
Power	9-30 VDC
Operating Temp	-40 to 75°C

FEATURES

- Master, slave, or snoop mode
- Scan up to 16 PVs
- Alphanumeric tag names
- Two open collector pulse or alarm outputs
- Backlight standard
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-window button programming

OPTIONS

- PD6830X explosion-proof version


PROGRAMMING SOFTWARE

- ScanView EX programming software
- Manage scanner settings
- Download data logs
- Set up K-factor, scaling, tag, units & more

PD6730X Vantageview Feet & Inches Modbus® Scanner



 vantageview



SPECIFICATIONS

Input	Modbus® RTU
Display	0.6" (15.24 mm) feet & inches upper display; 7 alphanumeric character lower display 0.4" (10.2 mm)
Enclosure	Plastic NEMA 4X field mount
Power	9-30 VDC
Operating Temp	-40 to 75°C

FEATURES

- Master, slave, or snooper mode
- Scan up to 16 PVs
- Ft & In display ideal for level applications
- Displays up to 699 ft 11 in & ⁷/₈ or ¹⁵/₁₆
- 20-segment tank level bargraph
- Alphanumeric tag names
- Two open collector alarm outputs
- Backlight standard
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-window button programming

OPTIONS

- PD6830X explosion-proof version


PROGRAMMING SOFTWARE

- ScanView EX programming software
- Manage scanner settings
- Download data logs
- Set up K-factor, scaling, tag, units & more

PD6770 Vantageview Large Display Meter



 vantageview



SPECIFICATIONS

Input	4-20 mA
Display	3½ digits, 1.0" (25.4 mm)
Enclosure	Plastic NEMA 4X field mount
Power	Loop-powered
Operating Temp	-40 to 75°C
V Drop	1.0 V 4.0 V with backlight

FEATURES

- Flanges for wall or pipe mounting
- Easy calibration and installation
- HART Protocol Transparent

OPTIONS

- Loop-powered backlight
- PD6870 explosion-proof version

PD663 ProtEX-Lite Process Meter

SPECIFICATIONS

Input	4-20 mA		
Display	3½+ digits, 0.6" (15.24 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP66		
Power	Loop-powered	V Drop	1.7 V
Operating Temp	-40 to 75°C		4.7 V with backlight



FEATURES

- Flanges for wall or pipe mounting
- Maximum/minimum display
- Programmable noise filter
- Multi-point linearization and square root function


OPTIONS

- Loop-powered backlight
- Reed switches for through-glass programming*

* PDA-MAG magnetic wand needed for reed switches



Explosion-proof. Complete product approved.



PD6800-0L1 ProtEX-Pro Level Meter

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.6" (15.24 mm); 7 alphanumeric character lower display 0.4" (10.2 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68		
Power	Loop-powered	V Drop	3.0 V
Operating Temp	-40 to 75°C		6.0 V with backlight



FEATURES


- Level indication bargraph
- Open collector Hi or Lo alarm
- Alphanumeric tag names
- 32-point, square root, or exponential linearization
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-glass button programming

OPTIONS

- PD6700-0L1 safe area version



Explosion-proof. Complete product approved.



PD6800 ProtEX-Pro Process Meter

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit upper display 0.7" (17.8 mm); 7 alphanumeric character lower display 0.4" (10.2 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68		
Power	Loop-powered	V Drop	3.0 V
Operating Temp	-40 to 75°C		6.0 V with backlight

FEATURES

- Alphanumeric tag names
- 32-point, square root, or exponential linearization
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-glass button programming

OPTIONS


- PD6700 safe area version



ProtEX™
Pro



Explosion-proof. Complete product approved.



PD6801 ProtEX-F&I Feet & Inches Level Meter

SPECIFICATIONS

Input	4-20 mA		
Display	0.6" (15.24 mm) feet & inches upper display; 7 alphanumeric character lower display 0.4" (10.2 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68		
Power	Loop-powered	V Drop	3.0 V
Operating Temp	-40 to 75°C		6.0 V with backlight

FEATURES

- Ft & In display ideal for level applications
- Displays up to 699 ft 11 in & $\frac{7}{8}$ or $\frac{15}{16}$
- Lower display for alphanumeric tag, volume, or percent
- 20-segment tank level bargraph
- Open collector Hi or Lo alarm
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-glass button programming

OPTIONS


- PD6701 safe area version



ProtEX™
F&I



Explosion-proof. Complete product approved.



PD6820 ProtEX-RTA Analog Input Flow Rate/Totalizer

SPECIFICATIONS

Input	4-20 mA		
Display	5-digit rate 0.7" (17.8 mm); 7 alphanumeric character total 0.4" (10.2 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68		
Power	Loop-powered	V Drop	3.0 V 6.0 V with backlight
Operating Temp	-40 to 75°C		

FEATURES

- 7-digit totalizer
- Open collector pulse or alarm output
- 32-point, square root, or exponential linearization
- Backlight standard
- Loop-powered
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-glass button programming

OPTIONS


- PD6720 safe area version



ProtEXTM
RTA



Explosion-proof. Complete product approved.



PD6830 ProtEX-RTP Pulse Input Flow Rate/Totalizer

SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, opto-isolated		
Display	5-digit rate 0.7" (17.8 mm); 7 alphanumeric character total 0.4" (10.2 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68		
Power	9-30 VDC, output-loop, or battery		
Operating Temp	-40 to 75°C (-20 to 75°C battery)		

FEATURES

- 13-digit total with overflow display
- Mounts directly to flowmeter
- Automatic rate, total, & grand total unit conversions
- On-board data logging (1024 points)
- Two isolated open collector pulse outputs, up to 5 kHz
- Backlight standard
- SafeTouch® through-glass button programming

OPTIONS

- Isolated 4-20 mA output for rate, total, or grand total
- Isolated or non-isolated RS-485 with Modbus® communications
- PD6730 safe area version

PROGRAMMING SOFTWARE


- MeterView® EX programming software
- Configure the meter
- Monitor present trends
- Log to as large of a file as needed



ProtEXTM
RTP



Explosion-proof. Complete product approved.



PD6830X ProtEX-MS2 Modbus® Scanner

SPECIFICATIONS

Input	Modbus® RTU, pulse
Display	5-digit rate 0.7" (17.8 mm); 7 alphanumeric character total 0.4" (10.2 mm)
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68
Power	9-30 VDC
Operating Temp	-40 to 75°C

FEATURES

- Master, slave, or snoop mode
- Scan up to 16 PVs
- Alphanumeric tag names
- Two open collector pulse or alarm outputs
- Backlight standard
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-glass button programming

OPTIONS

- PD6730X safe area version

PROGRAMMING SOFTWARE


- ScanView EX programming software
- Manage scanner settings
- Download data logs
- Set up K-factor, scaling, tag, units & more



ProtEX™
MS2



Explosion-proof. Complete product approved.



PD6830X ProtEX-MFI Feet & Inches Modbus® Scanner

SPECIFICATIONS

Input	Modbus® RTU
Display	0.6" (15.24 mm) feet & inches upper display; 7 alphanumeric character lower display 0.4" (10.2 mm)
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68
Power	9-30 VDC
Operating Temp	-40 to 75°C

FEATURES

- Master, slave, or snoop mode
- Scan up to 16 PVs
- Ft & In display ideal for level applications
- Displays up to 699 ft 11 in & $\frac{7}{8}$ or $\frac{15}{16}$
- 20-segment tank level bargraph
- Alphanumeric tag names
- Two open collector alarm outputs
- Backlight standard
- Flanges for wall or pipe mounting
- Password protection
- SafeTouch® through-glass button programming

OPTIONS

- PD6730X safe area version

PROGRAMMING SOFTWARE


- ScanView EX programming software
- Manage scanner settings
- Download data logs
- Set up K-factor, scaling, tag, units & more



ProtEX™
MFI



Explosion-proof. Complete product approved.



PD6870 ProtEX-FarVu Large Display Meter

SPECIFICATIONS

Input	4-20 mA		
Display	3½ digits, 1.0" (25.4 mm)		
Enclosure	Smooth die-cast aluminum explosion-proof, NEMA 4X/IP68		
Power	Loop-powered	V Drop	1.0 V
Operating Temp	-40 to 75°C		4.0 V with backlight

FEATURES

- Flanges for wall or pipe mounting
- Easy calibration and installation
- HART Protocol Transparent

OPTIONS


- Loop-powered backlight
- PD6770 safe area version



ProtEX™
FarVu



Explosion-proof. Complete product approved.



PD8-154 ProtEX-MAX 4-Point Annunciator

SPECIFICATIONS

Input	Switch, transistor, logic level
Display	4 red LED indicators
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-36 VDC
Operating Temp	-40 to 65°C

FEATURES


- 4-point monitoring
- All common ISA sequences
- Free custom message labels
- Built-In 85 dB horn
- Silence, acknowledge, and reset functions
- 2 SPDT relays for alarm activated devices
- Multiple-unit first-out indication
- Sunlight readable indication
- SafeTouch® through-glass buttons



ProtEX™
MAX



Explosion-proof. Complete product approved.



PD8-158 ProtEX-MAX 8-Point Annunciator

SPECIFICATIONS

Input	Switch, transistor, logic level
Display	8 red LED indicators
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-36 VDC
Operating Temp	-40 to 65°C

FEATURES


- 8-point monitoring
- All common ISA sequences
- Free custom message labels
- Built-in 85 dB horn
- Silence, acknowledge, and reset functions
- 2 SPDT relays for alarm activated devices
- Multiple-unit first-out indication
- Sunlight readable indication
- SafeTouch® through-glass buttons



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-765 ProtEX-MAX Process & Temperature Meter

SPECIFICATIONS

Input	Process: 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V) Temperature: Thermocouple J, K, T, E; RTD 100 Ω Pt
Display	4-digit, 1.20" (30.5 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-36 VDC option
Operating Temp	-40 to 65°C

FEATURES

- 1° or 0.1° resolution with RTD
- Sunlight readable display
- Maximum/minimum display
- Linear or square root with low-flow cutoff
- Transmitter power option
- SafeTouch® through-glass buttons
- Modbus® RS-485 serial communications
- Flanges for wall or pipe mounting

PROGRAMMING SOFTWARE

- MeterView® programming software free download

OPTIONS


- 2 relays and 4-20 mA analog output options
- 24 VDC transmitter power supply
- Dual 24 VDC transmitter power supplies



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6000 ProtEX-MAX Process Meter

IMPROVED

SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Isolated 24 VDC @ 25 mA transmitter power supply
- Multi-pump alternation control
- Dual-scale for level applications
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- Tare function
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6001 ProtEX-MAX Feet & Inches Level Meter

IMPROVED

SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Ft & In display ideal for level applications
- Isolated 24 VDC @ 25 mA transmitter power supply
- Multi-pump alternation control
- Dual-scale for level applications
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C internal relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6060 ProtEX-MAX Dual-Input Process Meter

IMPROVED

SPECIFICATIONS

Input	Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Displays two inputs simultaneously
- Math functions capabilities
- Isolated 24 VDC @ 25 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6080 ProtEX-MAX Modbus® Scanner with Dual Analog Inputs

IMPROVED

SPECIFICATIONS

Input	Modbus® RTU; Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Master, slave, or snooter mode
- Poll and display up to 16 PVs
- Math functions capabilities
- Isolated 24 VDC @ 25 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, square root, or exponential linearization
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & ScanView programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



Brilliant

Our Brightest & Most Intelligent ProtEX-MAX Ever



**Superluminous
Displays**

Our brightest
LEDs ever



**On-Board
MeterView® Pro**

PC programming
software



**On-Board
USB Port**

Streamlines meter
programming

See what ProtEX-MAX has to offer
www.predig.com/protex



PD8-6081 ProtEX-MAX Ft & In Modbus® Scanner with Dual Analog Inputs

IMPROVED

SPECIFICATIONS

Input	Modbus® RTU; Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V)
Display	Dual-line 6-digit, 0.60" (15 mm) feet & inches upper display, & 0.46" (12 mm) lower display
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Master, slave, or snooper mode
- Poll and display up to 16 PVs
- Ft & In display ideal for level applications
- Math functions capabilities
- Isolated 24 VDC @ 25 mA transmitter power supply
- Multi-pump alternation control
- Signal input conditioning for flow & level
- 32-point, sq. root, or exp. linearization
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & ScanView programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6100 ProtEX-MAX Strain Gauge Meter

IMPROVED

SPECIFICATIONS

Input	15, 30, 150, 300 mV unipolar; ± 15 , ± 25 , ± 150 , ± 250 mV bipolar; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- 5 or 10 VDC sensor excitation
- Capture or programmable tare feature
- Auto-zero feature eliminates zero drift
- Ratiometric operation
- Max/min or peak/valley hold feature
- Dual-scale feature - single input
- Rounding to 1, 2, 5, 10, 20, 50, or 100
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6200 ProtEX-MAX Analog Input Flow Rate/Totalizer

IMPROVED

SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Isolated 24 VDC @ 25 mA transmitter power supply
- Displays rate and total simultaneously
- Count up or down, total & grand total
- Open channel flow with programmable exponent
- Total, grand total, or non-resettable grand total
- 32-point linearization
- On-board digital input (for remote reset)
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtExTM
MAX



Explosion-proof. Complete product approved.



PD8-6210 ProtEX-MAX Analog Input Batch Controller

IMPROVED

SPECIFICATIONS

Input	0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Isolated 24 VDC @ 25 mA transmitter power supply
- Start, batch, pause, & stop with front panel buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching
- Automatic overrun correction
- Manual control or automatic batching
- On-board digital input (for remote reset)
- SafeTouch® through-glass button programming

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtExTM
MAX



Explosion-proof. Complete product approved.



PD8-6262 ProtEX-MAX Dual Analog Input Flow Rate/Totalizer

IMPROVED

SPECIFICATIONS

Input	Dual 0-20 mA, 4-20 mA; ± 10 VDC (0-5, 1-5, 0-10 V); Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Display two flow inputs simultaneously
- Display rate & total simultaneously
- Math functions capabilities
- Isolated 24 VDC @ 25 mA transmitter power supply
- Count up or down, total & grand total
- Open channel flow with programmable exponent
- Total, grand total, or non-resetable grand total
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6300 ProtEX-MAX Pulse Input Flow Rate/Totalizer

IMPROVED

SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- 5, 10, or 24 V flowmeter power supply
- Displays rate and total simultaneously
- Count up or down, total & grand total
- Gate function for rate display of slow pulse rates
- K-Factor, internal scaling, or external calibration
- Total, grand total, or non-resetable grand total
- On-board digital input (for remote reset)
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-6310 ProtEX-MAX Pulse Input Batch Controller

IMPROVED

SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- 5, 10, or 24 VDC flowmeter power supply
- K-Factor, internal scaling, or external calibration
- Start, batch, pause, & stop with front panel buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching
- Automatic overrun correction
- Manual control or automatic batching
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtExTM
MAX



Explosion-proof. Complete product approved.



PD8-6310-WM ProtEX-MAX Weights & Measures Batch Controller

IMPROVED

SPECIFICATIONS

Input	Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- NTEP® Certified weighing and measuring device
- Mechanical programming lockout
- Start, batch, pause, & stop buttons
- Display batch total + rate, grand total, batch count or preset
- Single or multi-stage batching
- Automatic overrun correction
- Manual control or automatic batching
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtExTM
MAX



Explosion-proof. Complete product approved.



PD8-6363 ProtEX-MAX Dual Pulse Input Flow Rate/Totalizer

IMPROVED

SPECIFICATIONS

Input	Dual Pulse, open collector, NPN, PNP, TTL, switch contact, sine wave (coil), square wave, Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-40 to 65°C

FEATURES

- **NEW** brighter SunBright display
- Displays two inputs simultaneously
- Displays rate and total simultaneously
- Math functions capabilities
- 5, 10, or 24 V flowmeter power supply
- Count up or down, total & grand total
- Gate function for rate display of slow pulse rates
- K-Factor, internal scaling, or external calibration
- Total, GT, or non-resetable grand total
- SafeTouch® through-glass buttons

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PD8-7000 ProtEX-MAX Temperature Meter

IMPROVED

SPECIFICATIONS

Input	Thermocouple J, K, T, E, R, S, B, N, C; RTD 100 Ω Pt, 10 Ω Cu, 120 Ω Ni, 1,000 Ω Pt; Modbus PV (slave)
Display	Dual-line 6-digit, 0.60" (15 mm) & 0.46" (12 mm)
Enclosure	Smooth die-cast aluminum explosion-proof; NEMA 4X, 7, 9/IP68
Power	85-265 VAC or 12-24 VDC option
Operating Temp	-20 to 65°C

FEATURES

- **NEW** brighter SunBright display
- 1° or 0.1° resolution
- Displays up to 3300°F
- Averages up to 10 RTD sensors
- Automatic cold junction compensation

PROGRAMMING SOFTWARE

- **NEW** on-board USB & MeterView® Pro programming software

OPTIONS


- 4-20 mA output with isolated 24 VDC power supply
- 2 or 4 form C relays



ProtEXTM
MAX



Explosion-proof. Complete product approved.



PDW30 Point to Point Wireless Bridge

NEW



PRECISION
DIGITAL
WIRELESS



Configure a system at
www.predig.com/wireless

SPECIFICATIONS

Input	4-20 mA, 0-10 V, 0-5 V, 1-5 V; 4 digital I/O; RS-485 Modbus®
Range	1 mile outdoor line-of-sight, 500 ft indoors
Display	32-character dual-line dot matrix LCD display
Enclosure	Smooth die-cast aluminum, NEMA 4X/IP66
Power	12-28 VDC
Operating Temp	-40 to 75°C

FEATURES

- Signal wire replacement in a rugged, industrial housing
- Inputs and outputs on both field units
- 1 mile line-of-sight, 500 ft indoor range
- 4-20 mA, digital, and RS-485 Modbus® communications outputs
- Remote or attached antenna
- Flanges for wall or pipe mounting
- Backlight standard
- On-board USB

PROGRAMMING SOFTWARE

- PDW Manager programming software

OPTIONS

- Repeater kit with remote antenna
- Remote antennas

PDW90 Point to Multi-Point Wireless Systems

NEW

PRECISION
DIGITAL
WIRELESS



Configure a system at
www.predig.com/wireless

SPECIFICATIONS

Input	4-20 mA; 0-10 V, 0-5 V, 1-5 V; 4 digital I/O; RS-485 Modbus®
Range	1 mile outdoor line-of-sight, 500 ft indoors
Display	Field units: 32 character dual-line dot matrix LCD display
Enclosure	Base station: Thermoplastic Polyester, NEMA 4X Field units: Smooth die-cast aluminum, NEMA 4X/IP66
Power	24 VDC
Operating Temp	-40 to 65°C

BASE STATION FEATURES

- Connect up to 32 field units
- Up to 16 expansion modules
- RS-485 Modbus Standard
- Point to multi-point signal wire replacement
- 1 mile line-of-sight, 500 ft indoor

PROGRAMMING SOFTWARE

- On-board USB and PDW Manager programming software

OPTIONS

- Analog input, analog output, relay output, and digital I/O cards
- Repeater kit with remote antenna
- Remote antennas

FIELD UNITS FEATURES

- Analog input and output, four digital I/O, and RS-485 Modbus® standard
- Remote or attached antenna

PDA10 PDW Wireless Signal Strength Survey Tool

NEW

FEATURES

- For use with PDW30 or PDW90
- 1 mile outdoor line-of-sight, 500 ft indoors range
- Includes a handheld unit and target unit
- Great for testing signal strength at desired installation




PDW90 Expansion Modules

NEW

EXPANSION MODULES

- PDA90-CA:** Dual analog input base station module
PDA90-CD: Four digital I/O base station module
PDA90-CR: Dual relay output base station module
PDA90-CT: Dual analog output base station module

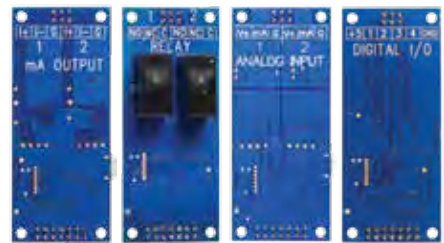

Repeaters

NEW

WIRELESS REPEATERS

PDW30-RNA: Repeater for PDW30 & PDW90 systems. Increases range an additional 1 mile line-of-sight, 500 ft indoors



Antennae & Cables

NEW

ANTENNAE

PDA3900-12-N: PDW 900 MHz Antenna, 1/2" NPT

YAGI ANTENNAE

PDA3900-6Y-N: Yagi Antenna 6dB

PDA3900-9Y-N: Yagi Antenna 9dB

CABLES

PDA3120-S: RP-SMA M/F Antenna Cable 20ft

PDA3140-S: RP-SMA M/F Antenna Cable 40ft

PDA3120-N: RP-SMA F to N Male Antenna Cable 20ft

PDA3140-N: RP-SMA F to N Male Antenna Cable 40ft

PD138 Minimux® II Temperature & Process Scanner

SPECIFICATIONS

Input	TC, RTD, Process, AC, DC
Display	Eight LED indicators
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	115 VAC, 230 VAC, or 12-24 VDC
Operating Temp	-40 to 65°C

FEATURES

- 8 inputs per unit
- Unlimited number of units per system
- Adjustable dwell time for each channel
- Independent alarm input for each channel
- First-out alarm indication
- Free custom message labels
- Built-in 85 dB horn

OPTIONS

- Current loop resistor



MINIMUX® II



PD154 Vigilante® II 4-Point Alarm Annunciator

SPECIFICATIONS

Input	Switch, transistor, logic level; High Voltage AC or DC inputs with PDA1500 module
Display	Four red LED indicators
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC
Operating Temp	-40 to 65°C

FEATURES

- 4-point monitoring
- All common ISA sequences
- Free custom message labels
- Built-In 85 dB horn
- Silence, acknowledge, and reset functions
- 2 SPDT relays for alarm activated devices
- Multiple-unit first-out indication
- Sunlight readable indication

ACCESSORIES

- PDA1500 high voltage AC/DC to logic level converter



Vigilante® II



PDA1500 High Voltage AC/DC to Logic Level Converter

For use with PD154 and PD158 annunciators.

It converts high voltage signals into logic level signals for use as a digital input to a wide range of process control and display equipment. For details see [page 63](#)

PD158 Vigilante® II 8-Point Alarm Annunciator

SPECIFICATIONS

Input	Switch, transistor, logic level; High Voltage AC or DC inputs with PDA1500 module
Display	Eight red LED indicators
Enclosure	1/8 DIN NEMA 4X/IP65 front
Power	85-265 VAC or 12-36 VDC
Operating Temp	-40 to 65°C

FEATURES

- 8-point monitoring
- All common ISA sequences
- Free custom message labels
- Built-In 85 dB horn
- Silence, acknowledge, and reset functions
- 2 SPDT relays for alarm activated devices
- Multiple-unit first-out indication
- Sunlight readable indication

ACCESSORIES

- PDA1500 high voltage AC/DC to logic level converter



Vigilante II



PDS178 Temperature Scanning System

SPECIFICATIONS

Input	J, K, E, T thermocouples, 100 Ω platinum RTD
Display	4-digit + 8 LED indicators
Enclosure	NEMA 4X plastic
Power	115 VAC
Operating Temp	-40 to 65°C

FEATURES

- 8-channel temperature scanner
- Temperature indicator with 2 relays
- NEMA 4X plastic enclosure
- 8 inputs per unit
- Built-in 85 dB horn
- First-out indication
- Sunlight readable indication
- Free custom message labels

OPTIONS

- PDS178: 0.56" (14.2 mm) display
- PDS178X2: 1.2" (30.5 mm) display



PDA1500 High Voltage AC/DC to Logic Level Converter

For use with PD154 and PD158 annunciators.

It converts high voltage signals into logic level signals for use as a digital input to a wide range of process control and display equipment. For details see [page 63](#)

PD940 ConsoliDator 4 Four-Channel Controller (Wall)

SPECIFICATIONS

Input	Analog: four 4-20 mA inputs; Pulse: four 100 mVp-p to 15 Vp-p, 1 Hz to 10 kHz
Display	4.75" x 3.50" (121 mm x 89 mm), 6-digit
Enclosure	NEMA 1, powder-coated steel
Power	90-264 VAC or 8-30 VDC
Mounting	Wall
Operating Temp	0 to 50°C

FEATURES

- Sunlight readable display
- Four pulse and four digital inputs
- Nine 10 A relays
- Process/rate & total display
- 32-point linearization
- RS-232 Modbus RTU
- Direct Modbus PV inputs



PD941 ConsoliDator 4 Four-Channel Controller (Panel)

SPECIFICATIONS

Input	Analog: four 4-20 mA inputs; Pulse: four 100 mVp-p to 15 Vp-p, 1 Hz to 10 kHz
Display	4.75" x 3.50" (121 mm x 89 mm), 6-digit
Enclosure	NEMA 1, powder-coated steel
Power	90-264 VAC or 8-30 VDC
Mounting	Panel
Operating Temp	0 to 50°C

FEATURES

- Sunlight readable display
- Four pulse and four digital inputs
- Nine 10 A relays
- Process/rate & total display
- 32-point linearization
- RS-232 Modbus RTU
- Direct Modbus PV inputs



PD980 ConsoliDator 8 Eight-Channel Controller (Wall)

SPECIFICATIONS

Input	Analog: eight 4-20 mA inputs; Pulse: four 100 mVp-p to 15 Vp-p, 1 Hz to 10 kHz
Display	4.75" x 3.50" (121 mm x 89 mm), 6-digit
Enclosure	NEMA 1, powder-coated steel
Power	90-264 VAC or 8-30 VDC
Mounting	Wall
Operating Temp	0 to 50°C

FEATURES

- Sunlight readable display
- Four pulse and four digital inputs
- Nine 10 A relays
- Process/rate & total display
- 32-point linearization
- RS-232 Modbus RTU
- Direct Modbus PV inputs



PD981 ConsoliDator 8 Eight-Channel Controller (Panel)

SPECIFICATIONS

Input	Analog: eight 4-20 mA inputs; Pulse: four 100 mVp-p to 15 Vp-p, 1 Hz to 10 kHz
Display	4.75" x 3.50" (121 mm x 89 mm), 6-digit
Enclosure	NEMA 1, powder-coated steel
Power	90-264 VAC or 8-30 VDC
Mounting	Panel
Operating Temp	0 to 50°C

FEATURES

- Sunlight readable display
- Four pulse and four digital inputs
- Nine 10 A relays
- Process/rate & total display
- 32-point linearization
- RS-232 Modbus RTU
- Direct Modbus PV inputs



PD540 Nova Series Digital PID Controllers

SPECIFICATIONS

Input	Universal process & temperature
Display	Dual, 4-digit
Enclosure	1/16, 3/16, 1/8, and 1/4 DIN
Power	100-240 VAC
Operating Temp	10 to 50°C



FEATURES

- Auto-tuning PID
- Easy & quick set point changes
- Relay & analog outputs standard
- High accuracy
- IP55 & IP65 fronts
- Free operating & data logging software

OPTIONS

- Digital inputs
- Heating and cooling
- RS-485 serial communications

NOVA CE C 



NOVA Virtual Meter
novavirtualmeter.com

PD550 Nova Series Ramp & Soak Controllers

SPECIFICATIONS

Input	Universal process & temperature
Display	Dual, 4-digit
Enclosure	1/16, 3/16, 1/8, and 1/4 DIN
Power	100-240 VAC
Operating Temp	10 to 50°C



FEATURES

- Two 15-segment ramp & soak programs
- Relay & analog outputs standard
- High accuracy
- IP55 & IP65 fronts
- Free operating & data logging software

OPTIONS

- Digital inputs or digital outputs
- RS-485 serial communications

NOVA CE C 

PD560 Nova Series Digital Meters

SPECIFICATIONS

Input	Universal process & temperature
Display	Dual, 4-digit
Enclosure	1/8 and 1/4 DIN
Power	100-240 VAC
Operating Temp	10 to 50°C



FEATURES

- Relay & analog outputs standard
- High accuracy
- IP55 & IP65 fronts
- Free operating & data logging software

OPTIONS

- Digital inputs
- RS-485 serial communications

NOVA CE c  US

PD570 Nova Series Limit Controllers

SPECIFICATIONS

Input	Universal process & temperature
Display	Dual, 4-digit
Enclosure	1/16 and 1/4 DIN
Power	100-240 VAC
Operating Temp	10 to 50°C



FEATURES

- Latching limit relay
- Relay & analog outputs standard
- High accuracy
- IP55 & IP65 fronts
- Free operating & data logging software

OPTIONS

- RS-485 serial communications

NOVA CE c  US

PDA2300 Economical Plastic NEMA 4X Enclosures



SPECIFICATIONS

Material Thermoplastic polyester
Color Gray
Ratings NEMA 4X, UL, C-UL

FEATURES

- House up to 10 meters
- Horizontal or vertical cutouts
- Hinged door

PDA2500 Rugged Plastic NEMA 4X Enclosures



SPECIFICATIONS

Material Thermoplastic polyester
Color Gray
Ratings NEMA 4X, UL, C-UL

FEATURES

- House up to 10 meters
- Horizontal or vertical cutouts
- NEMA 1, 3, 3S, 4, 4X, and 12
- Hinged door

PDA2600 Stainless Steel NEMA 4X Enclosures



SPECIFICATIONS

Material PDA2601: 16-gauge, type 304 SS. PDA2602-2606: 14-gauge, type 304 SS
Color Stainless steel
Ratings UL 50 type 4; NEMA 4; CSA type 4; IP66

FEATURES

- House up to 6 meters
- Horizontal or vertical cutouts
- 16-gauge, type 304 stainless steel
- 14-gauge, type 304 stainless steel
- NEMA 4, 4X, 12, and 13
- Hinged door

PDA2700 Steel NEMA 4 Enclosures



SPECIFICATIONS

Material PDA2701: 16-gauge steel. PDA2702-2706: 14-gauge steel
Color Painted steel
Ratings UL 50 type 4; NEMA 4; CSA type 4; IP66

FEATURES

- House up to 6 meters
- Horizontal or vertical cutouts
- 16-gauge, Type 304 steel
- 14-gauge, Type 304 steel
- NEMA 4, 12, and 13
- Hinged door



Need help selecting an enclosure? Go to www.predig.com/esu
 The Enclosure Selection Utility finds the right enclosure for your meters and application.

PDA2800 Low-Cost Plastic NEMA 4X Enclosures




SPECIFICATIONS

Material	Thermoplastic polyester
Color	Gray
Ratings	NEMA 4X

FEATURES

- House up to 2 meters
- 1/2" conduit hole on PDA2801 and PDA2811

PDA2900 Plastic NEMA 4X Enclosures for ConsoliDator Series

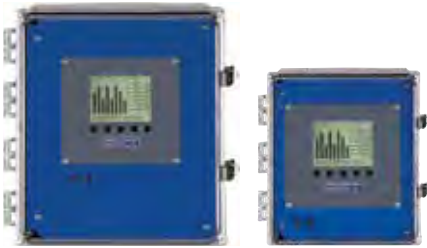

SPECIFICATIONS

Material	Enclosure & cover: polycarbonate Front panel: painted aluminum Cover latches: stainless steel
Color	Enclosure: light gray Cover: transparent Front panel: blue
Ratings	Type 1, 2, 3, 3R, 4, 4X, 12, & 12K. UL & C-UL listed enclosure

FEATURES

- House up to 1 PD941 or PD981
- Hinged clear cover
- Hinged front mounting panel
- Fuse holder and power switch

ACCESSORIES

- Sub-panels
- Mounting kit

PDA3400 Plastic NEMA 4X Enclosures



SPECIFICATIONS

Material	Thermoplastic with clear polycarbonate cover
Color	Enclosure: light gray; Cover: transparent
Ratings	UL (USA & Canada), NEMA 4X

FEATURES

- Meter mounted inside cover
- Mounting brackets
- One to three meters
- NEMA 4X
- UL Listed



Need help selecting an enclosure? Go to www.predig.com/esu
The Enclosure Selection Utility finds the right enclosure for your meters and application.

MeterView® EX Software For PD6830 & PD6730

SPECIFICATIONS

System Req.	Windows® XP, Vista, 7, 8, 10
Comm.	RS-485 adapter or direct USB adapter from PD6830 / PD6730.
Meter Address	1 - 247
Baud Rate	1,200 - 115,200 bps, selection must match the baud rate selected in the meter
Configure	One meter at a time
Reports	Data logging: Save as CSV file format Configuration: Save as MVE file or print configuration
Protocol	Modbus RTU



FEATURES

Communicate from a PC to

- Configure the meter
- Monitor present trends
- Log to as large of a file as needed

REQUIRED ADAPTER

- **PDA8068** USB serial adapter for programming only
- **PDA8485** USB to RS-485 converter

MeterView® Pro Software For PROVu®, ProtEX-MAX, and Helios Series

SPECIFICATIONS

System Req.	Windows® 2000, XP, Vista, 7, 8, 10
Comm.	One meter at a time: USB, RS-232, or RS-485
Meter Address	1 - 247
Baud Rate	300 - 19,200 bps
Reports	Data logging: Save as CSV file format Configuration: Save as PDC file format or print configuration
Protocol	Modbus RTU (requires PROVu® firmware version 2.0 or higher)

FEATURES

- Configure the meter
- Monitor present trends
- Log to as large of a file as needed
- On-board most PROVu®, Helios, and ProtEX-MAX meters
- No need for downloading drivers



REQUIRED ADAPTER

- Free USB cable included with meter for programming only
- **PDA1485** RS-485 serial adapter & **PDA8485** USB to RS-485 converter
- **PDA1232** RS-232 serial adapter

MeterView® Software For Trident Series

SPECIFICATIONS

System Req.	Windows® XP (SP3), Vista, 7, 8, 10
Comm.	USB, RS-232, or RS-485 Adapter
Meter Address	00 - 99
Baud Rate	300 - 19,200 bps
Configure	One meter at a time
Reports	Data logging: Save as HTML file format Configuration: Save as plain text, export to HTML, or print configuration

FEATURES

- Monitor up to 100 meters
- Program or read meter settings
- Save meter profiles for cloning
- Use profiles for reporting



REQUIRED ADAPTER

- **PDA8006** Trident USB serial adapter for programming only
- **PDA7422** RS-485 serial adapter & **PDA8485** USB to RS-485 converter
- **PDA7232** Trident RS-232 serial adapter

ScanView EX Software For PD6830X & PD6730X

SPECIFICATIONS

System Req.	Windows® 2000, XP, Vista, 7, 8, 10
Comm.	USB, RS-232, or RS-485 adapter
Scanner Address	1 - 247
Reports	Data logging: Save as CSV file format
Baud Rate	1,200 - 115,200 bps
Configure	One scanner at a time
Protocol	Modbus RTU

FEATURES

- Communicate from a PC to
- Manage scanner settings
- Download data logs
- Set up K-factor, scaling, tag, units & more



REQUIRED ADAPTER

- **PDA8068** USB serial adapter for programming only
- **PDA8485** USB to RS-485 converter for meters with serial communications

ScanView Software For PROVu®, ProtEX-MAX, and Helios Modbus Scanners

SPECIFICATIONS

System Req.	Windows® 2000, XP, Vista, 7, 8, 10
Comm.	RS-232, or RS-485 Adapter
Meter Address	1 - 247
PV Slave ID	1-247, 256-259 for on-board current & voltage inputs
Reports	Data logging: Save as CSV file format Configuration: Save as MVP file format or print configuration
Baud Rate	300 - 19,200 bps
Configure	One meter at a time
Protocol	Modbus RTU



FEATURES

- Use in Modbus master, slave, or snoop mode
- Scan up to 16 Modbus process variables
- Easily configure Modbus Scanners
- Data log all PVs to a PC
- On-board all PROVu®, Helios, and ProtEX-MAX Modbus® scanners

REQUIRED ADAPTER

- Free USB cable included with meter for programming only
- **PDA1485** RS-485 serial adapter (PD6080/6081) & **PDA8485** USB to RS-485 converter

PDW Manager Software For PDW30 and PDW90 Wireless Systems

SPECIFICATIONS

System Req.	Windows® XP, Vista, 7, 8, 10
Comm.	USB 2.0 (Standard USB A to Micro USB B)
Config.	Configure devices one at a time

FEATURES

- Program base stations from PC
- Program field units from a PC

REQUIRED CABLE

- Free USB cable included with units for programming only



PDA1500 High VAC/VDC to Logic Level Converter

SPECIFICATIONS

Modes	Straight conversion or series break
Mounting	DIN Rail
Channels	4
Inputs	85-130 or 185-265 VAC/VDC
Outputs	TTL compatible logic (+5 V)
Power	12-24 VDC

FEATURES

- Combine with the Vigilante® II annunciator to monitor high voltages
- Four high voltage inputs - up to 265 VAC or VDC
- Four 5 VDC digital outputs
- Easy DIN rail mounting
- Simple two-button setup
- Cascade mode for series break configurations
- Multi-unit cascade mode



PROVu® Accessories



Required Cable
Included

EXPANSION MODULES

- PDA1004:** 4-relay module
PDA1011*: Dual 4-20 mA output module
PDA1044: 4 digital I/O module

* For use with PD2-6060, PD2-6080, PD2-6081, PD2-6088, PD2-6089, PD2-6262, PD2-6363, PD2-6400 PD6060, PD6080, PD6081, PD6088, PD6089, PD6262, PD6363, and PD6400 only.

SERIAL ADAPTERS

- PDA1232:** RS-232 serial adapter
PDA1485: RS-485 serial adapter

ADDITIONAL ACCESSORIES

- PDA1002:** DIN-rail mounting kit

Tags



STAINLESS STEEL

- PDA-SSTAG:** Stainless Steel Tag
 Order at www.predig.com/pda-sstag

Trident Accessories



Required Cable
Included

SERIAL ADAPTERS

- PDA7232:** RS-232 serial adapter
PDA7422: RS-485 serial adapter
PDA8006: USB serial adapter

ADDITIONAL ACCESSORIES

- PDA7420:** Meter copy cable

Helios Accessories



PLUGS

- PDAPLUG2:** Plastic Conduit Plug

MOUNTING KIT

- PDA6260:** Pipe Mounting Kit Zinc Plated Steel

Serial Converters



Required Cable
Included

RS-232 TO RS-485

- PDA7485-I:** converter, isolated
PDA7485-N: converter, non-isolated

USB TO RS-232

- PDA8232-N:** converter, non-isolated

USB TO RS-485

- PDA8485-I:** converter, isolated
PDA8485-N: converter, non-isolated

PDA8068 Adapter



USE WITH METERVIEW EX & SCANVIEW EX

- PDA8068:** USB serial adapter for PD6730, PD6730X, PD6830, & PD6830X (Required cable included)

Note: Used for configuration only

CONTACT US



U.S. & Canada
1-800-343-1001

International
1-508-655-7300



Tech Support
support@predig.com

Sales
sales@predig.com



Message / Live Chat
www.predig.com



Corporate Office
233 South St • Hopkinton, MA 01748 USA



Fax
1-508-655-8990

Follow us



DISCLAIMER

The information contained in this document is subject to change without notice. Precision Digital Corporation makes no representations or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose.

© 2017 Precision Digital Corporation. All rights reserved.

LMSFC_L 01/17



www.predig.com

PRECISION DIGITAL CORPORATION *Since 1974*